

C67K

Windows and door systems

The brand new range of high-performance windows and doors offers two distinct levels of thermal insulation: High+ and Top+, specifically designed to meet the diverse needs of the market. Equipped with new locking mechanisms and advanced hinges — including concealed versions with 180° opening and load capacity up to 180 kg — these windows and doors represent the latest C67K system. This solution not only ensures security and reliability, but also features a contemporary design that combines functionality and aesthetics.

FEATURES

- › Flat, rounded, chamfered profiles
- › Burglar-resistant system
- › Central gasket sealing technology
- › Load capacity up to 180 kg
- › Concealed and visible hardware

OPTIONS

- › Inward opening
- › Turn before tilt opening
- › Tilt and turn opening
- › Bottom hung sash
- › Upper fixed glass / panel
- › Bottom fixed glass / panel
- › Outward opening sash
- › Top hung opening



SPECIFICATIONS

PERFORMANCES AND CERTIFICATIONS

	C67K
U_w (Double glazing $U_g = 1.0 \text{ W/m}^2\text{K}$)	1.25 $\text{W/m}^2\text{K}$
U_w (Triple glazing $U_g = 0.6 \text{ W/m}^2\text{K}$)	0.91 $\text{W/m}^2\text{K}$
Air permeability	Class 4 (600 Pa)
Water tightness	Class E_{1500} (1500 Pa)
Wind resistance	Class C5 (2000 Pa)

SYSTEM SPECIFICATIONS

Frame depth (fixed frame)	67 mm
Sash depth (opening frame)	77 mm
Maximum height	2300 mm
Maximum width	1530 mm
Maximum sash weight	< 150 kg (with concealed hardware)

GLAZING

Thickness	28 – 52 mm
-----------	------------


CONFIGURATIONS




SECTIONS AND DETAILS

Further details are available upon request


LATERAL JOINT - STANDARD LINE

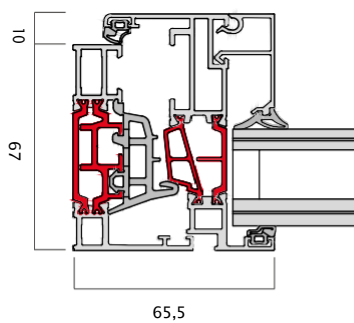


CENTRAL SECTION - STANDARD LINE

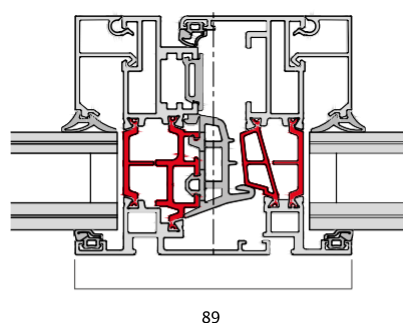


REDUCED THRESHOLD

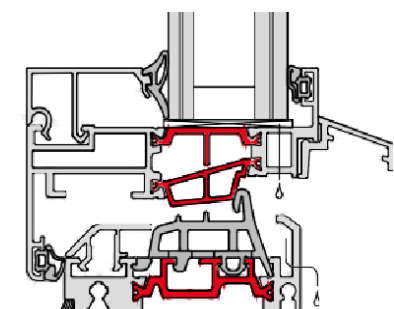

LATERAL JOINT - STEEL LOOK LINE

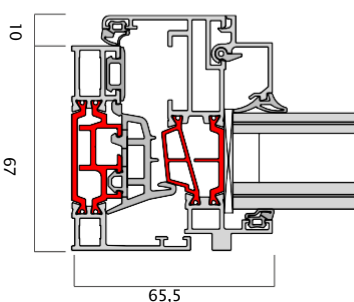

CENTRAL SECTION - STEEL LOOK LINE

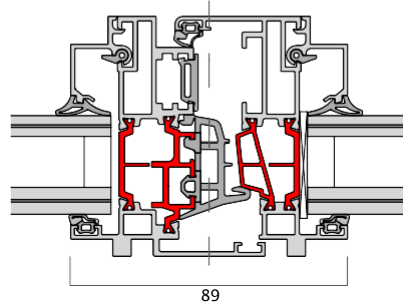

REDUCED THRESHOLD - STEEL LOOK LINE

